

CONTINUOUS BUS GUTTERS



FEATURES AND BENEFITS

- CSA Type 1 or 3R rated enclosure
- Screw on lift off cover c/w padlock provision
- Designed for wall mounting
- Mild steel construction
- Industry standard ASA-61 grey industrial powder coat finish
- 600V Rating
- Continuous aluminum bus bar

OPTIONS AVAILABLE

(Consult Factory)

- CSA Type 3R, (Add prefix C3R-)
- CSA Type 4 or 4X (Add prefix 4- or 4X-)
- Stainless steel or aluminum construction
- Custom powder coat finish
- Custom sizes
- Custom lugs
- Locking hinged covers
- Add suffix (-L) to part # for standard lug configuration

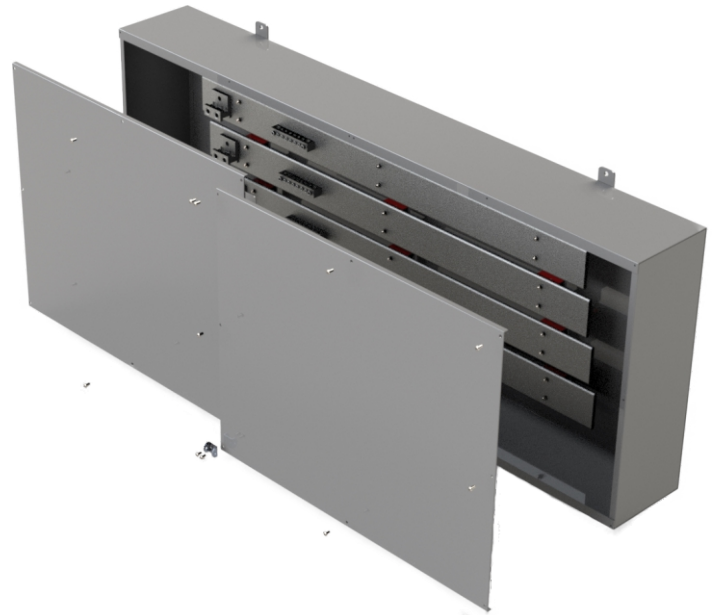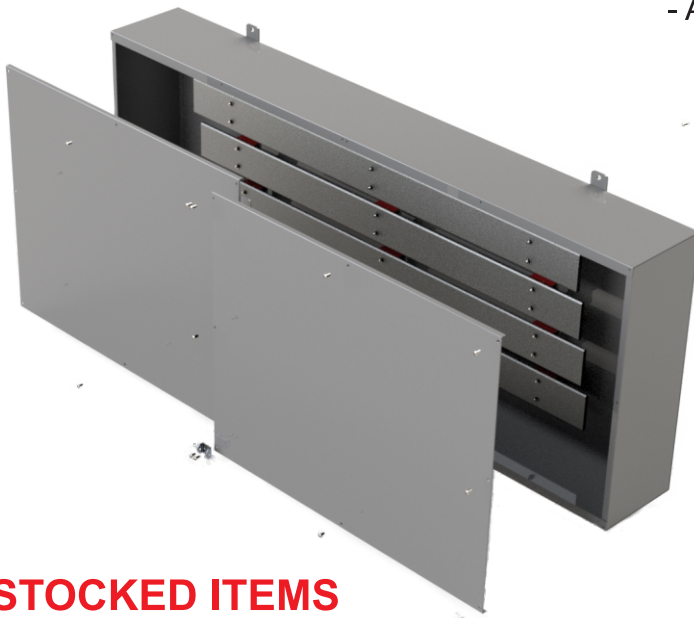

* STOCKED ITEMS

TYPE 1 - 6' & 8'

TYPE 3R - 6' & 8'

Model # (3W)	Model # (4W)	Amps	Description
800-6-3*	800-6-4*	800	29"H x 72"W x 10"D
800-8-3*	800-8-4*	800	29"H x 96"W x 10"D
800-10-3	800-10-4	800	29"H x 120"W x 10"D
800-12-3	800-12-4	800	29"H x 144"W x 10"D
1000-6-3*	1000-6-4*	1000	29"H x 72"W x 10"D
1000-8-3*	1000-8-4*	1000	29"H x 96"W x 10"D
1000-10-3	1000-10-4	1000	29"H x 120"W x 10"D
1000-12-3	1000-12-4	1000	29"H x 144"W x 10"D
1200-6-3*	1200-6-4*	1200	29"H x 72"W x 10"D
1200-8-3*	1200-8-4*	1200	29"H x 96"W x 10"D
1200-10-3	1200-10-4	1200	29"H x 120"W x 10"D
1200-12-3	1200-12-4	1200	29"H x 144"W x 10"D

Optional Standard Lug Configuration	
Main	Branch
(2) 600 MCM	(2) #6 to 300 MCM + (6) #14 to 2/0
(2) 600 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 600 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 600 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 800 MCM	(2) #6 to 300 MCM + (6) #14 to 2/0
(2) 800 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 800 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 800 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 1000 MCM	(2) #6 to 300 MCM + (6) #14 to 2/0
(2) 1000 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 1000 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0
(2) 1000 MCM	(4) #6 to 300 MCM + (12) #14 to 2/0